Figure 1

composite low coherence 775 nm / CW 1550 nm beam

DI

70




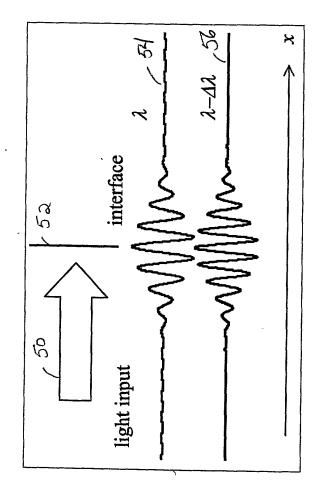


Figure 2

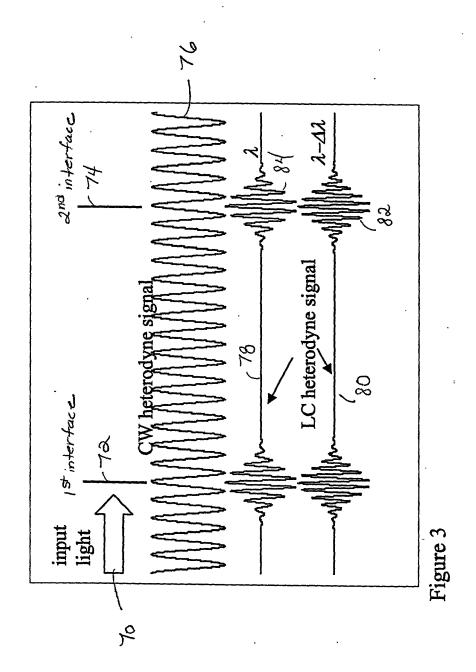

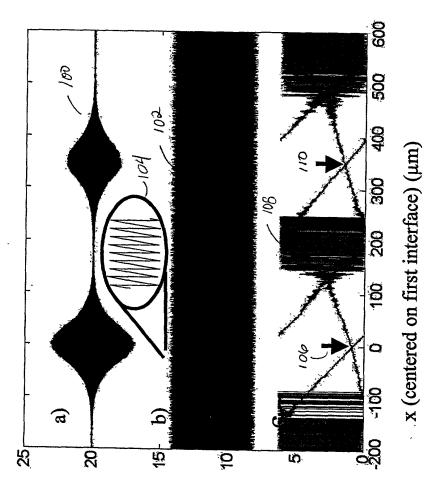

igure 4

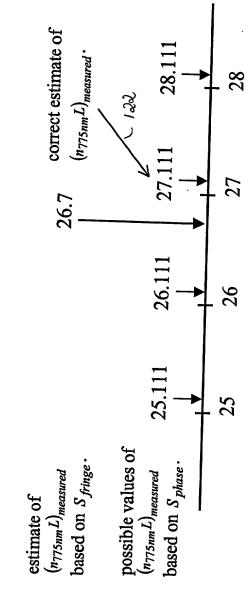

the entire scan

Repeating the scan with the wavelength of the light being

slightly detuned

To Figure 6B

136

137

Figure 6A

|uuk

The state of the s

Harry.

ļ=nis

150

The second


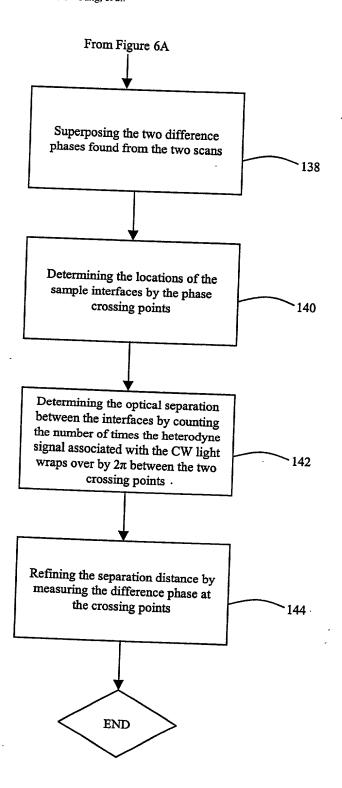


Figure 6B

Docket No. 301505.3002-100 Title: System and Method for Measuring Optical

Distance
Inventors: Yang, et al.

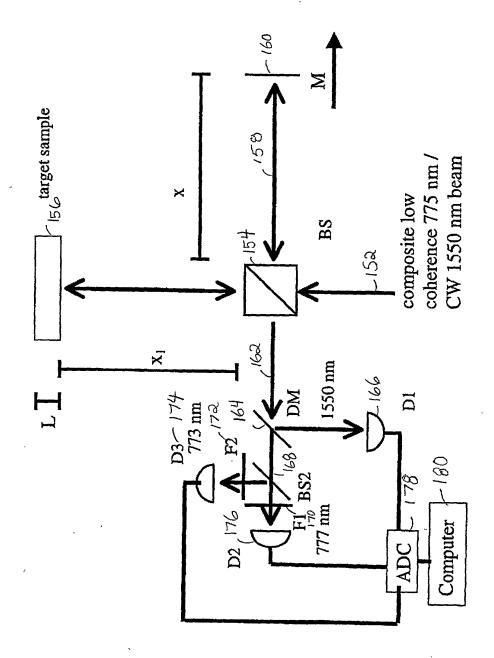

H H J June 1

Figure 7

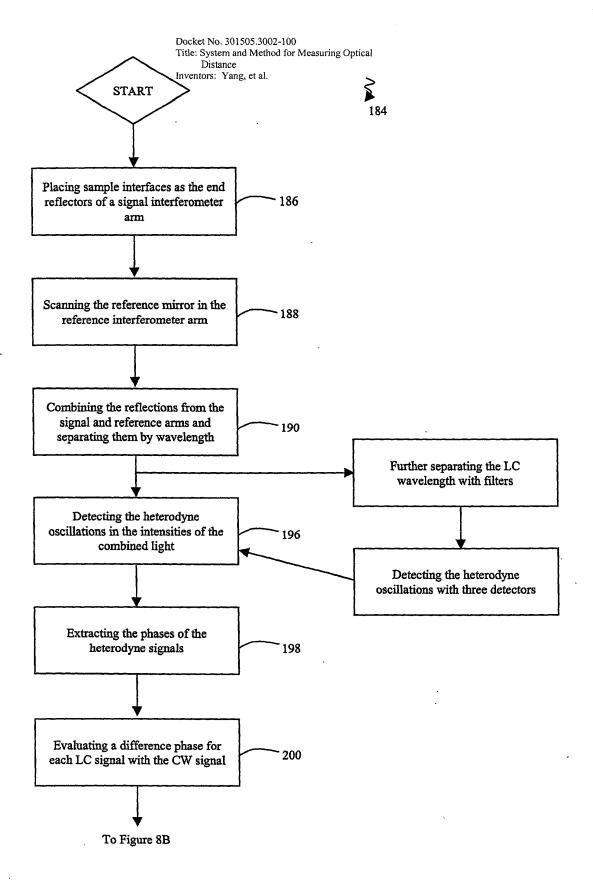


Figure 8A

|s=k


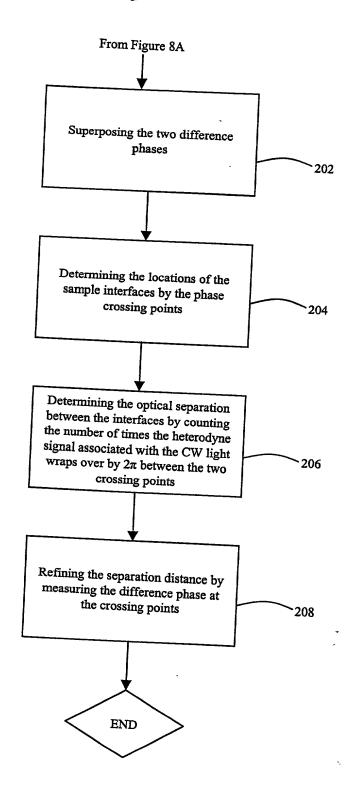


Figure 8B

Inventors: Yang, et al.

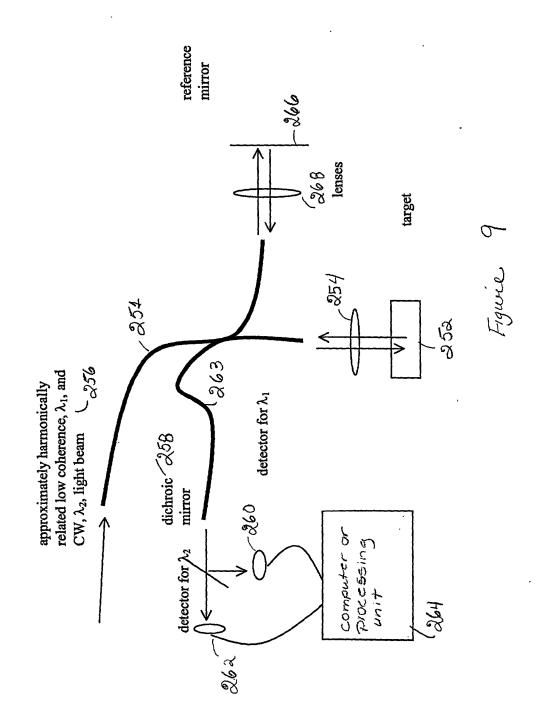

The part was a second to the control of the control

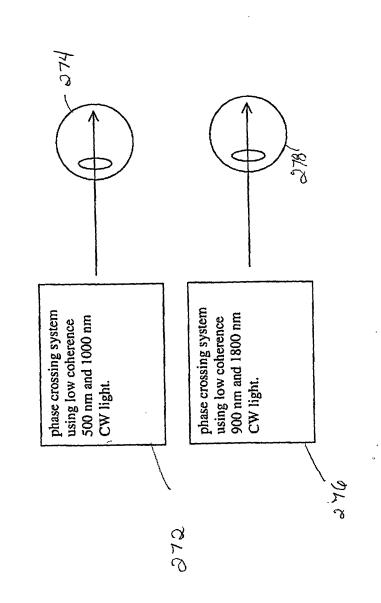


Figure 10